



Design Radiators by ISAN

Akros with hooks

Its robust vertical pipes turn the Akros heating unit into an eye-catching designer piece that will fit in any interior, particularly in entrance halls and dining rooms. Its metallic colours are one of the main features that make it stand out. The unit also comes with hooks.



connection sets
→ 146



electric regulators
→ 154



colour ref. chart
→ 159





Akros with hooks



Code Height (H) /Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016	Electric
DAKH 1500 0350	100	17,7	15,8	1,280	685	-	50	✓	-
DAKH 1500 0470	100	23,6	21,2	1,280	914	-	50	✓	-
DAKH 1500 0590	100	29,5	26,5	1,280	1142	-	50	✓	-
DAKH 1800 0170	100	10,6	9,2	1,280	407	-	50	✓	-
DAKH 1800 0350	100	21,0	19,0	1,280	814	-	50	✓	-
DAKH 1800 0470	100	28,0	25,3	1,280	1086	-	50	✓	-
DAKH 1800 0590	100	35,0	31,7	1,280	1357	-	50	✓	-

For ordering procedure see page 160 / The weight of radiators does not include water and packaging.


Technical information

Material	steel pipes ø 28 mm steel pipes ø 50 mm
Connection threads	2xG1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	95 °C
Number of pipes	3, 6, 8, 10
Number of hooks	3, 4, 6, 8

Modification options


Surface treatment	colour
Height range [mm]	600-2000 (increase of 10)
Length range [mm]	170-830 (increase of 60)
Change of dimensions	additional charge
Electric version	NO
Middle connection (SM)	STANDARD
Standard connection (SK)	NO
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO

Type height (H) / length (L) [mm]

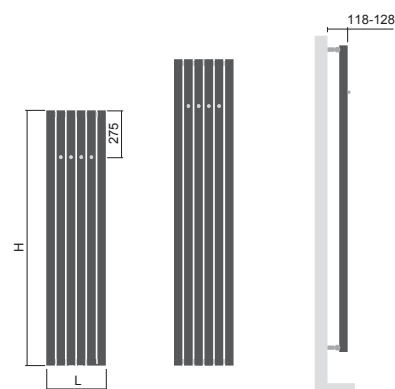


H	1500	H	1800
L	0350-0590	L	0170-0590

Mounting



Type	X [mm]	A [mm]
Metal brackets	54-64	140-150

Connection options



The type of connection must be specified in the order; for more information see page 160, positions 13 and 14.



Practical hooks